

FT-MB-3

3 LED Mini Brow

5" Low Profile Scene Light

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-3 SPECS

RAW LUMENS	1,584
EFFECTIVE LUMENS	1,108.8
WATTAGE	15W
AMPERAGE	1.25A
INPUT VOLTAGE	9-32V DC

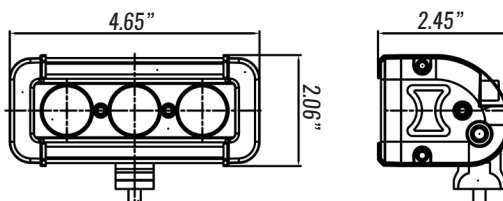

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*



L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*



End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length	# of Mounting Feet
FT-MB-3-S-B	3 LED Mini Brow. 5" length. 10 degree spot optic configuration. Black housing	1,584	1,108.8	15W	1.25A	spot	5"	1
FT-MB-3-S-W	3 LED Mini Brow. 5" length. 10 degree spot optic configuration. White housing.	1,584	1,584	15W	1.25A	spot	5"	1
FT-MB-3-F-B	3 LED Mini Brow. 5" length. 60 degree flood optic configuration. Black housing	1,584	1,584	15W	1.25A	flood	5"	1
FT-MB-3-F-W	3 LED Mini Brow. 5" length. 60 degree flood optic configuration. White housing.	1,584	1,584	15W	1.25A	flood	5"	1
FT-MB-3-FT-B	3 LED Mini Brow. 5" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing	1,584	1,584	15W	1.25A	combo	5"	1
FT-MB-3-FT-W	3 LED Mini Brow. 5" length. FireTech Combination spot and flood optic configuration. White housing.	1,584	1,584	15W	1.25A	combo	5"	1

6 LED Mini Brow

9" Low Profile Scene Light

FT-MB-6

ABOUT THE MINI BROW LIGHT



The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-6 SPECS

RAW LUMENS	3,168
EFFECTIVE LUMENS	2,217.60
WATTAGE	30W
AMPERAGE	2.5A @ 12V DC
INPUT VOLTAGE	9-32V DC

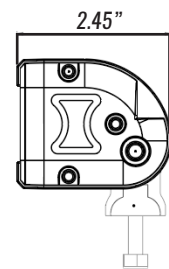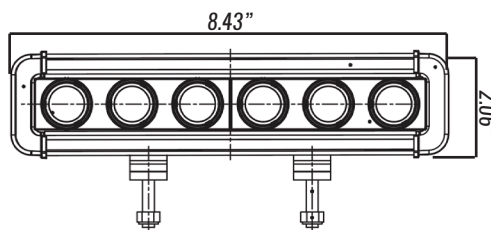

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*



L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*



End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-6-S-B	6 LED Mini Brow. 9" length. 10 degree spot optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Spot	9"	2
FT-MB-6-S-W	6 LED Mini Brow. 9" length. 10 degree spot optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Spot	9"	2
FT-MB-6-F-B	6 LED Mini Brow. 9" length. 60 degree flood optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Flood	9"	2
FT-MB-6-F-W	6 LED Mini Brow. 9" length. 60 degree flood optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Flood	9"	2
FT-MB-6-FT-B	6 LED Mini Brow. 9" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Combo	9"	2
FT-MB-6-FT-W	6 LED Mini Brow. 9" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Combo	9"	2

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-9 SPECS

RAW LUMENS	4,752
EFFECTIVE LUMENS	3,326.40
WATTAGE	45W
AMPERAGE	3.75A @ 12V DC
INPUT VOLTAGE	9-32V DC

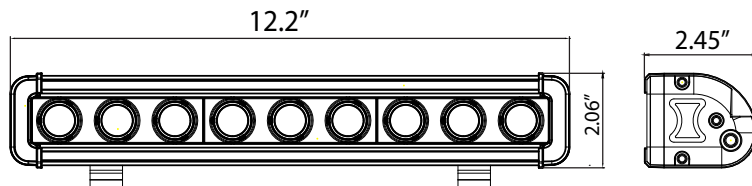

Included Mounting:



Pedestal Mounting Feet
Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket
P-MB-R3FOOT-*



L Foot Mounting Bracket (Vertical Surface)
P-MB-LFOOT-*



End Cap Mounting Bracket
FT-MBKIT-LPX-*

Model #	Description	Raw lumens	Effective lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-9-S-B	9 LED Mini Brow. 12" length. 10 degree spot optic configuration. Black housing.	4,752	3,326.40	45W	3.75A	Spot	12"	2
FT-MB-9-S-W	9 LED Mini Brow. 12" length. 10 degree spot optic configuration. White housing.	4,752	3,326.40	45W	3.75A	Spot	12"	2
FT-MB-9-F-B	9 LED Mini Brow. 12" length. 60 degree flood optic configuration. Black housing.	4,752	3,326.40	45W	3.75A	Flood	12"	2
FT-MB-9-F-W	9 LED Mini Brow. 12" length. 60 degree flood optic configuration. White housing.	4,752	3,326.40	45W	3.75A	Flood	12"	2
FT-MB-9-FT-B	9 LED Mini Brow. 12" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	4,752	3,326.40	45W	3.75A	Combo	12"	2
FT-MB-9-FT-W	9 LED Mini Brow. 12" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	4,752	3,326.40	45W	3.75A	Combo	12"	2

15 LED Mini Brow

20" Low Profile Scene Light

FT-MB-15

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-15 SPECS

RAW LUMENS	7,290
EFFECTIVE LUMENS	5,544
WATTAGE	75W
AMPERAGE	6.25A @ 12V DC
INPUT VOLTAGE	9-32V DC

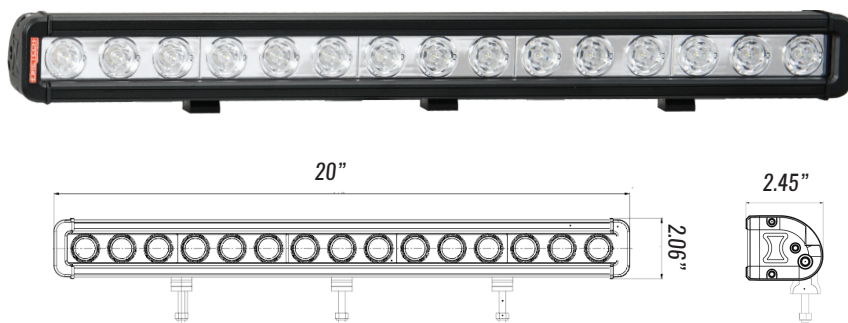

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*

L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*

End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-15-S-B	15 LED Mini Brow. 20" length. 10 degree spot optic configuration. Black housing	7,290	5,544	75W	6.25A	Spot	20"	3
FT-MB-15-S-W	15 LED Mini Brow. 20" length. 10 degree spot optic configuration. White housing	7,290	5,544	75W	6.25A	Spot	20"	3
FT-MB-15-F-B	15 LED Mini Brow. 20" length. 60 degree flood optic configuration. Black housing	7,290	5,544	75W	6.25A	Flood	20"	3
FT-MB-15-F-W	15 LED Mini Brow. 20" length. 60 degree flood optic configuration. White housing	7,290	5,544	75W	6.25A	Flood	20"	3
FT-MB-15-FT-B	15 LED Mini Brow. 20" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing	7,290	5,544	75W	6.25A	Combo	20"	3
FT-MB-15-FT-W	15 LED Mini Brow. 20" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing	7,290	5,544	75W	6.25A	Combo	20"	3

21 LED Mini Brow

27" Low Profile Scene Light

FT-MB-21

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-21 SPECS

RAW LUMENS	11,088
EFFECTIVE LUMENS	7,761.60
WATTAGE	105W
AMPERAGE	8.75A @12V DC
INPUT VOLTAGE	9-32V DC

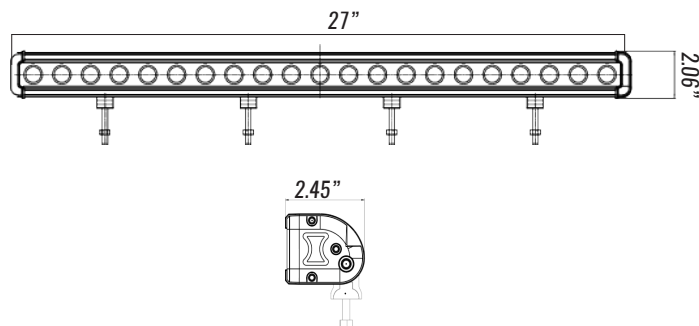

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*

L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*

End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-21-S-B	21 LED Mini Brow. 27" length. 10 Degree spot optic configuration. Black housing.	11,088	7,761.60	105W	8.75A	Spot	27"	4
FT-MB-21-S-W	21 LED Mini Brow. 27" length. 10 Degree spot optic configuration. White housing.	11,088	7,761.60	105W	8.75A	Spot	27"	4
FT-MB-21-F-B	21 LED Mini Brow. 27" length. 60 Degree flood optic configuration. Black housing.	11,088	7,761.60	105W	8.75A	Flood	27"	4
FT-MB-21-F-W	21 LED Mini Brow. 27" length. 60 Degree flood optic configuration. White housing.	11,088	7,761.60	105W	8.75A	Flood	27"	4
FT-MB-21-FT-B	21 LED Mini Brow. 27" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	11,088	7,761.60	105W	8.75A	Combo	27"	4
FT-MB-21-FT-W	21 LED Mini Brow. 27" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	11,088	7,761.60	105W	8.75A	Combo	27"	4

24 LED Mini Brow

31" Low Profile Scene Light

FT-MB-24

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-24 SPECS

RAW LUMENS	12,672
EFFECTIVE LUMENS	8,870.40
WATTAGE	120W
AMPERAGE	10A @ 12V DC
INPUT VOLTAGE	9-32V DC

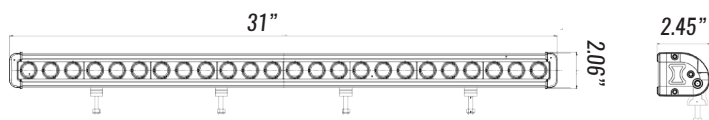

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*



L Foot Mounting Bracket (Vertical Surface)

FT-MB-LFOOT-*



End Cap Mounting Bracket

P-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-24-S-B	24 LED Mini Brow. 31" length. 10 degree spot optic configuration. Black housing.	12,672	8,870.40	120W	10A	Spot	31"	4
FT-MB-24-S-W	24 LED Mini Brow. 31" length. 10 degree spot optic configuration. White housing.	12,672	8,870.40	120W	10A	Spot	31"	4
FT-MB-24-F-B	24 LED Mini Brow. 31" length. 60 degree flood optic configuration. Black housing.	12,672	8,870.40	120W	10A	Flood	31"	4
FT-MB-24-F-W	24 LED Mini Brow. 31" length. 60 degree flood optic configuration. White housing.	12,672	8,870.40	120W	10A	Flood	31"	4
FT-MB-24-FT-B	24 LED Mini Brow. 31" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	12,672	8,870.40	120W	10A	Combo	31"	4
FT-MB-24-FT-W	24 LED Mini Brow. 31" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	12,672	8,870.40	120W	10A	Combo	31"	4

24 LED Mini Brow

31" Trunnion Mount Scene Light

FT-MB-24-TRGWA


ABOUT THE MINI BROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. Offered in 3 sizes only, the Trunnion Mounting kit makes for simplified installation in areas where access to the back side of a panel is difficult, or when extreme adjustability is required. The trunnion mounting kit also allows for mounting on the side of an apparatus where some angling would be expected and difficulties in installation might be encountered.

Key Features:

- 5w LEDs with precision Acrylic optics
- All Aluminum Extrusion
- TRGWA Mount for easy adjustment up and down

When customers request a fixture longer than 18 LEDs with a "trunnion" bracket, the brackets change from a single piece of stamped and formed material to two independent "wing" style brackets. There are still considered "trunnion" brackets, but are built from two pieces instead of one. The part number designation is "-TRGWA" vs "-TR" is required.

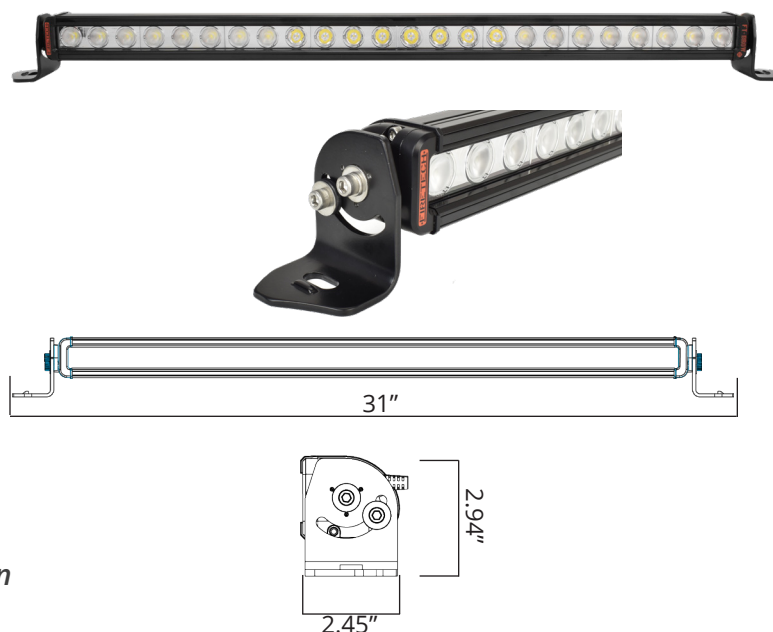

FT-MB-24-TR-*-* SPECS

RAW LUMENS	12,672
EFFECTIVE LUMENS	8,870.40
WATTAGE	120W
AMPERAGE	10A
INPUT VOLTAGE	9-32V DC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-24-TRGWA-S-B	24 LED Mini Brow. 31" length. 10 degree spot optic configuration. Black housing. TRGWA mount	12,672	8,870.40	120W	10A	Spot	31"
FT-MB-24-TRGWA-S-W	24 LED Mini Brow. 31" length. 10 degree spot optic configuration. White housing. TRGWA mount	12,672	8,870.40	120W	10A	Spot	31"
FT-MB-24-TRGWA-F-B	24 LED Mini Brow. 31" length. 60 degree flood optic configuration. Black housing. TRGWA mount	12,672	8,870.40	120W	10A	Flood	31"
FT-MB-TRGWA-24-F-W	24 LED Mini Brow. 31" length. 60 degree flood optic configuration. White housing. TRGWA mount	12,672	8,870.40	120W	10A	Flood	31"
FT-MB-24-TRGWA-FT-B	24 LED Mini Brow. 31" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing. TRGWA mount	12,672	8,870.40	120W	10A	Combo	31"
FT-MB-24-TRGWA-FT-W	24 LED Mini Brow. 31" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing. TRGWA mount	12,672	8,870.40	120W	10A	Combo	31"

27 LED Mini Brow

35" Low Profile Scene Light

FT-MB-27

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-27 SPECS

RAW LUMENS	14,256
EFFECTIVE LUMENS	9,979.60
WATTAGE	135W
AMPERAGE	11.25A @ 12V DC
INPUT VOLTAGE	9-32V DC

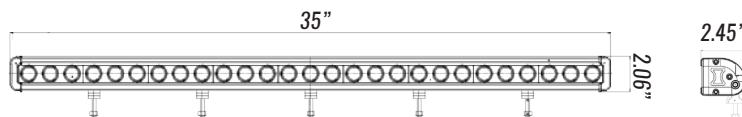

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*

L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*

End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-27-S-B	27 LED Mini Brow. 35" length. 10 degree spot optic configuration. Black housing.	14,256	9,979.60	135W	11.25A	Spot	35"	5
FT-MB-27-S-W	27 LED Mini Brow. 35" length. 10 degree spot optic configuration. White housing.	14,256	9,979.60	135W	11.25A	Spot	35"	5
FT-MB-27-F-B	27 LED Mini Brow. 35" length. 60 degree flood optic configuration. Black housing.	14,256	9,979.60	135W	11.25A	Flood	35"	5
FT-MB-27-F-W	27 LED Mini Brow. 35" length. 60 degree flood optic configuration. White housing.	14,256	9,979.60	135W	11.25A	Flood	35"	5
FT-MB-27-FT-B	27 LED Mini Brow. 35" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	14,256	9,979.60	135W	11.25A	Combo	35"	5
FT-MB-27-FT-W	27 LED Mini Brow. 35" length. 14,256 lumens. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	14,256	9,979.60	135W	11.25A	Combo	35"	5

33 LED Mini Brow

42" Low Profile Scene Light

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-27 SPECS

RAW LUMENS	17,424
EFFECTIVE LUMENS	12,196.80
WATTAGE	165W
AMPERAGE	13.75A @12V DC
INPUT VOLTAGE	9-32V DC

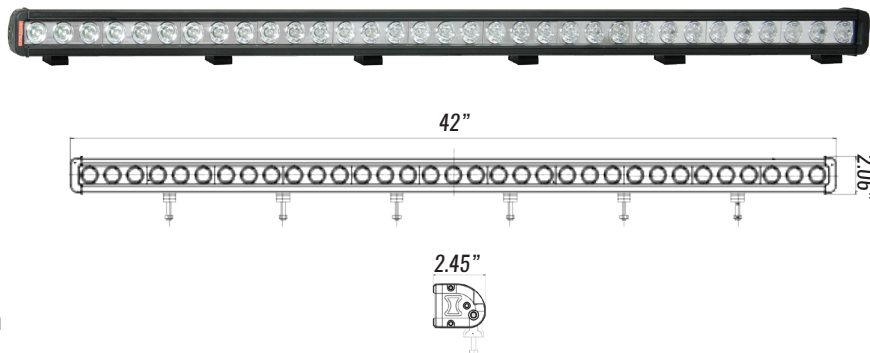

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*

L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*

End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-33-S-B	33 LED Mini Brow. 42" length. 10 degree spot optic configuration. Black housing.	17,424	12,196.80	165W	13.75A	Spot	42"	6
FT-MB-33-S-W	33 LED Mini Brow. 42" length. 10 degree spot optic configuration. White housing.	17,424	12,196.80	165W	13.75A	Spot	42"	6
FT-MB-33-F-B	33 LED Mini Brow. 42" length. 60 degree flood optic configuration. Black housing.	17,424	12,196.80	165W	13.75A	Flood	42"	6
FT-MB-33-F-W	33 LED Mini Brow. 42" length. 60 degree flood optic configuration. White housing.	17,424	12,196.80	165W	13.75A	Flood	42"	6
FT-MB-33-FT-B	33 LED Mini Brow. 42" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	17,424	12,196.80	165W	13.75A	Combo	42"	6
FT-MB-33-FT-W	33 LED Mini Brow. 42" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	17,424	12,196.80	165W	13.75A	Combo	42"	6

39 LED Mini Brow

50" Low Profile Scene Light

FT-MB-39

ABOUT THE MINI BROW LIGHT


The FireTech Mini Brow Light is an extruded LED work light designed for the industrial and emergency response marketplace. The Mini Brow series is a single-circuit fixture with multiple optic choices. 10 degree "Spot" optics are optimized for long distance projection. 60 degree Flood optics work great on the rear and for general purpose illumination. The FireTech Combination Optic pattern uses 1/3 spot, 2/3 flood optics and gives you a hybrid beam pattern without sacrificing optic efficiency. The Mini Brow fixtures are available in 3 LED increments from 3 to 39 LEDs long, and are backed by the industry's only LIFETIME Warranty.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options

FT-MB-39 SPECS

RAW LUMENS	20,592
EFFECTIVE LUMENS	14,414.40
WATTAGE	195W
AMPERAGE	16.25A @12V DC
INPUT VOLTAGE	9-32V DC

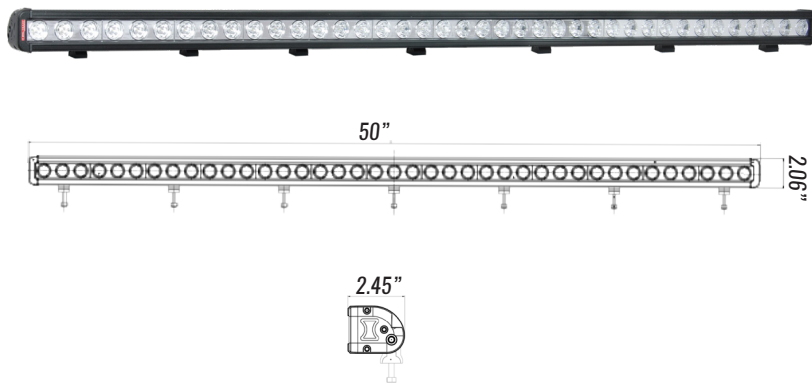

Included Mounting:



Pedestal Mounting Feet

Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket

P-MB-R3FOOT-*

L Foot Mounting Bracket (Vertical Surface)

P-MB-LFOOT-*

End Cap Mounting Bracket

FT-MBKIT-LPX-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @ 12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-39-S-B	39 LED Mini Brow. 50" length. 10 degree spot optic configuration. Black housing.	20,592	14,414.40	195W	16.25A	Spot	50"	7
FT-MB-39-S-W	39 LED Mini Brow. 50" length. 10 degree spot optic configuration. White housing.	20,592	14,414.40	195W	16.25A	Spot	50"	7
FT-MB-39-F-B	39 LED Mini Brow. 50" length. 60 degree flood optic configuration. Black housing.	20,592	14,414.40	195W	16.25A	Flood	50"	7
FT-MB-39-F-W	39 LED Mini Brow. 50" length. 60 degree flood optic configuration. White housing.	20,592	14,414.40	195W	16.25A	Flood	50"	7
FT-MB-39-FT-B	39 LED Mini Brow. 50" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	20,592	14,414.40	195W	16.25A	Combo	50"	7
FT-MB-39-FT-W	39 LED Mini Brow. 50" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	20,592	14,414.40	195W	16.25A	Combo	50"	7

FT-MB-* -TR-* -*

ABOUT THE MINI BROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. Offered in 3 sizes only, the Trunnion Series make for simplified installation in areas where access to the back side of a panel is difficult, or when extreme adjustability is required. The trunnion bracket also allows for mounting on the side of an apparatus where some angling would be expected and difficulties in installation might be encountered.


Key Features:

- 5w LEDs with precision Acrylic optics
- All Aluminum Extrusion
- Adjustable Trunnion Mount

The Trunnion style Mini Brow lights are available in 9, 12, and 18 LED Lengths. This mounting system attaches to the fixtures end caps and allows for adjustable mounting with greater range of motion.

60 POINT LOCKING AIMING SYSTEM

The sturdy Trunnion bracket allows the Mini Brow Light to be precisely aimed regardless of mounting location. Enjoy full rotation flexibility from an ultra low profile housing.

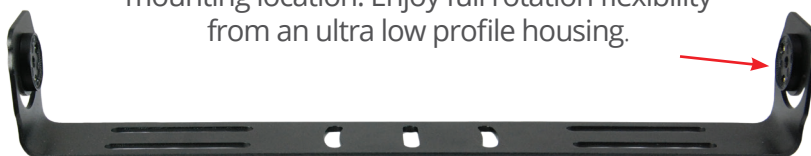

FT-MB-9-TR-* -W | 9 LEDs | 4,752 RAW LM



FT-MB-12-TR-* -W | 12 LEDs | 6,336 RAW LM



FT-MB-18-TR-* -W | 18 LEDs | 9,504 RAW LM



Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-9-TR-S-B	9 LED mini brow w/ trunnion mount. 14" length. 10 degree spot optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Spot	14"
FT-MB-9-TR-S-W	9 LED mini brow w/ trunnion mount. 14" length. 10 degree spot optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Spot	14"
FT-MB-9-TR-F-B	9 LED mini brow w/ trunnion mount. 14" length. 60 degree flood optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Flood	14"
FT-MB-9-TR-F-W	9 LED mini brow w/ trunnion mount. 14" length. 60 degree flood optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Flood	14"
FT-MB-9-TR-FT-B	9 LED mini brow w/ trunnion mount. 14" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Combo	14"
FT-MB-9-TR-FT-W	9 LED mini brow w/ trunnion mount. 14" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Combo	14"

FT-MB-* -TR-* -*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-12-TR-S-B	12 LED mini brow w/ trunnion mount. 18" length. 10 degree spot optic configuration. Black housing.	6,336	4,435.2	60W	5A	Spot	18"
FT-MB-12-TR-S-W	12 LED mini brow w/ trunnion mount. 18" length. 10 degree spot optic configuration. White housing.	6,336	4,435.2	60W	5A	Spot	18"
FT-MB-12-TR-F-B	12 LED mini brow w/ trunnion mount. 18" length. 60 degree flood optic configuration. Black housing.	6,336	4,435.2	60W	5A	Flood	18"
FT-MB-12-TR-F-W	12 LED mini brow w/ trunnion mount. 18" length. 60 degree flood optic configuration. White housing.	6,336	4,435.2	60W	5A	Flood	18"
FT-MB-12-TR-FT-B	12 LED mini brow w/ trunnion mount. 18" length. Combination 10 and 60 degree FireTech optic configuration. Black housing.	6,336	4,435.2	60W	5A	Combo	18"
FT-MB-12-TR-FT-W	12 LED mini brow w/ trunnion mount. 18" length. Combination 10 and 60 degree FireTech optic configuration. White housing.	6,336	4,435.2	60W	5A	Combo	18"
FT-MB-18-TR-S-B	18 LED mini brow w/ trunnion mount. 25.2" length. 10 degree spot optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Spot	25"
FT-MB-18-TR-S-W	18 LED mini brow w/ trunnion mount. 25.2" length. 10 degree spot optic configuration. White housing	9,504	6,652.80	90W	7.5A	Spot	25"
FT-MB-18-TR-F-B	18 LED mini brow w/ trunnion mount. 25.2" length. 60 degree flood optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Flood	25"
FT-MB-18-TR-F-W	18 LED mini brow w/ trunnion mount. 25.2" length. 60 degree Flood optic configuration. White housing	9,504	6,652.80	90W	7.5A	Flood	25"
FT-MB-18-TR-FT-B	18 LED mini brow w/ trunnion mount. 25.2" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Combo	25"
FT-MB-18-TR-FT-W	18 LED mini brow w/ trunnion mount. 25.2" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing	9,504	6,652.80	90W	7.5A	Combo	25"

FT-MB-9-TR-**-*




ABOUT THE MINI BROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. Offered in 3 sizes only, the Trunion Series make for simplified installation in areas where access to the back side of a panel is difficult, or when extreme adjustability is required. The trunion bracket also allows for mounting on the side of an apparatus where some angling would be expected and difficulties in installation might be encountered.

Key Features:

- 5w LEDs with precision Acrylic optics
- All Aluminum Extrusion
- Adjustable Trunion Mount

The Trunion style Mini Brow lights are available in 9, 12, and 18 LED Lengths. This mounting system attaches to the fixtures end caps and allows for adjustable mounting with greater range of motion.

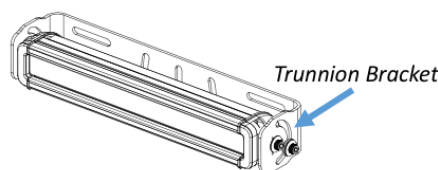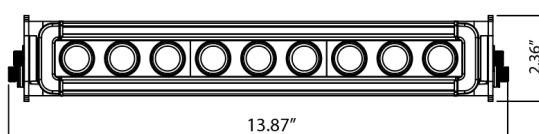

FT-MB-9-TR-**-* SPECS

RAW LUMENS	4,752
EFFECTIVE LUMENS	3,326.4
WATTAGE	45W
AMPERAGE	3.75A
INPUT VOLTAGE	9-32V DC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-9-TR-S-B	9 LED mini brow w/ trunion mount. 14" length. 10 degree spot optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Spot	14"
FT-MB-9-TR-S-W	9 LED mini brow w/ trunion mount. 14" length. 10 degree spot optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Spot	14"
FT-MB-9-TR-F-B	9 LED mini brow w/ trunion mount. 14" length. 60 degree flood optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Flood	14"
FT-MB-9-TR-F-W	9 LED mini brow w/ trunion mount. 14" length. 60 degree flood optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Flood	14"
FT-MB-9-TR-FT-B	9 LED mini brow w/ trunion mount. 14" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing.	4,752	3,326.4	45W	3.75A	Combo	14"
FT-MB-9-TR-FT-W	9 LED mini brow w/ trunion mount. 14" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing.	4,752	3,326.4	45W	3.75A	Combo	14"

FT-MB-12-TR-*-*




ABOUT THE MINI BROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. Offered in 3 sizes only, the Trunnion Series make for simplified installation in areas where access to the back side of a panel is difficult, or when extreme adjustability is required. The trunnion bracket also allows for mounting on the side of an apparatus where some angling would be expected and difficulties in installation might be encountered.

Key Features:

- 5w LEDs with precision Acrylic optics
- All Aluminum Extrusion
- Adjustable Trunnion Mount

The Trunnion style Mini Brow lights are available in 9, 12, and 18 LED Lengths. This mounting system attaches to the fixtures end caps and allows for adjustable mounting with greater range of motion.

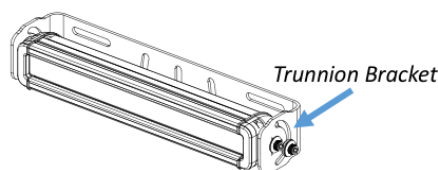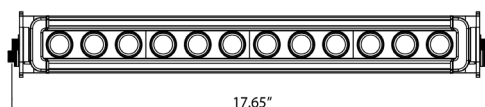

FT-MB-12-TR-*-* SPECS

RAW LUMENS	6,336
EFFECTIVE LUMENS	4,435.20
WATTAGE	60W
AMPERAGE	5A
INPUT VOLTAGE	9-32V DC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-12-TR-S-B	12 LED mini brow w/ trunnion mount. 18" length. 10 degree spot optic configuration. Black housing.	6,336	4,435.2	60W	5A	Spot	18"
FT-MB-12-TR-S-W	12 LED mini brow w/ trunnion mount. 18" length. 10 degree spot optic configuration. White housing.	6,336	4,435.2	60W	5A	Spot	18"
FT-MB-12-TR-F-B	12 LED mini brow w/ trunnion mount. 18" length. 60 degree flood optic configuration. Black housing.	6,336	4,435.2	60W	5A	Flood	18"
FT-MB-12-TR-F-W	12 LED mini brow w/ trunnion mount. 18" length. 60 degree flood optic configuration. White housing.	6,336	4,435.2	60W	5A	Flood	18"
FT-MB-12-TR-FT-B	12 LED mini brow w/ trunnion mount. 18" length. Combination 10 and 60 degree FireTech optic configuration. Black housing.	6,336	4,435.2	60W	5A	Combo	18"
FT-MB-12-TR-FT-W	12 LED mini brow w/ trunnion mount. 18" length. Combination 10 and 60 degree FireTech optic configuration. White housing.	6,336	4,435.2	60W	5A	Combo	18"

FT-MB-18-TR-*-*


ABOUT THE MINI BROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. Offered in 3 sizes only, the Trunnion Series make for simplified installation in areas where access to the back side of a panel is difficult, or when extreme adjustability is required. The trunnion bracket also allows for mounting on the side of an apparatus where some angling would be expected and difficulties in installation might be encountered.

Key Features:

- 5w LEDs with precision Acrylic optics
- All Aluminum Extrusion
- Adjustable Trunnion Mount

The Trunnion style Mini Brow lights are available in 9, 12, and 18 LED Lengths. This mounting system attaches to the fixtures end caps and allows for adjustable mounting with greater range of motion.

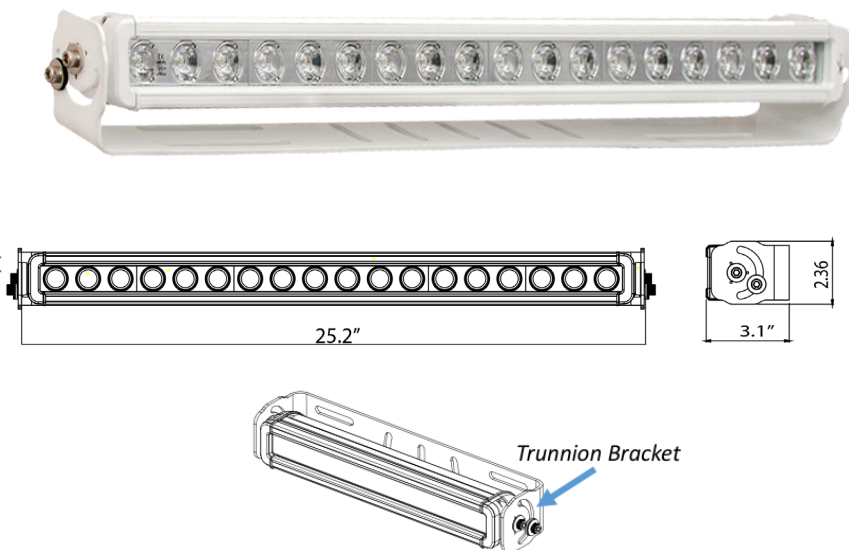

FT-MB-18-TR-*-* SPECS

RAW LUMENS	9,504
EFFECTIVE LUMENS	6,652.80
WATTAGE	90W
AMPERAGE	7.5A
INPUT VOLTAGE	9-32V DC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage	Beam Pattern	Length
FT-MB-18-TR-S-B	18 LED mini brow w/ trunnion mount. 25" length. 10 degree spot optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Spot	25"
FT-MB-18-TR-S-W	18 LED mini brow w/ trunnion mount. 25" length. 10 degree spot optic configuration. White housing	9,504	6,652.80	90W	7.5A	Spot	25"
FT-MB-18-TR-F-B	18 LED mini brow w/ trunnion mount. 25" length. 60 degree flood optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Flood	25"
FT-MB-18-TR-F-W	18 LED mini brow w/ trunnion mount. 25" length. 60 degree Flood optic configuration. White housing	9,504	6,652.80	90W	7.5A	Flood	25"
FT-MB-18-TR-FT-B	18 LED mini brow w/ trunnion mount. 25" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. Black housing	9,504	6,652.80	90W	7.5A	Combo	25"
FT-MB-18-TR-FT-W	18 LED mini brow w/ trunnion mount. 25" length. FireTech Combination 10 degree spot and 60 degree flood optic configuration. White housing	9,504	6,652.80	90W	7.5A	Combo	25"